DIRECT DRAW DISPENSER

MICRO MATIC

PRO-LINE™ E-SERIES™ 25" - 1 KEG

- Designed by beer-industry experts for performance and value.
- Rugged keg slide - extends floor life.
- Full-size drain tray - larger work area and improved hygiene.
- Commercial grade construction - built to last.
- Digital thermostat.



MDD23-E
Black



MDD23S-E
Stainless Steel

Listed by Edison Testing Laboratories.
Conforms to UL & NSF Standards.

Job Number:_____ Location:_____ _____

PART NO.	FINISH	DOORS	Shipping Weight
☐ MDD23-E	Black	1	172 lbs
☐ MDD23S-E	Stainless Steel	1	172 lbs


OPERATING PERFORMANCE

Capacity of 1/2 Kegs	1	**Running Amps**	2.5
Cubic Feet (liters)	8.4 (239)	**Voltage**	115/60/1
Number of Draft Towers	1	**Plug Type**	NEMA-5-15P
Number of Faucets	1	**Cord Length**	8’
Beer Tower Approval	NSF 7.0 and NSF 18	**Refrigerant**	R290
Approval	ETL Listed	**Charge oz**	5.64
Condenser HP	1/6	**Thermostat**	Digital


Exterior	All Models:18 gauge stainless steel top, 22 gauge solid doors, 24 gauge steel front, sides and back. Black Vinyl Models: Front, sides. Stainless Steel Models: Front, sides
Interior	20 gauge stainless steel floor, reinforced frame, 24 gauge galvanized walls
Ventilation	Back ventilated
Plumbing	Drain Tray: 3/4" NPT drain includes hose and drain bottle. Automatic condensate evaporator, no drain connection required. Evaporator condensate has been plumbed to a condensate pan located in the compressor housing.
Insulation	Foamed-in-place using high density, CFC-free polyurethane; 2" top, walls and floor.
Casters	Standard

DIMENSIONS


TOP

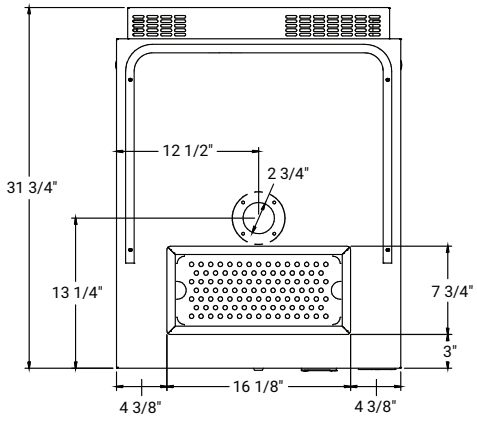

FRONT

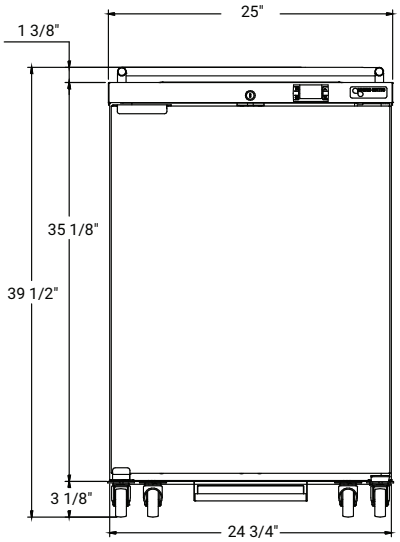

SIDE

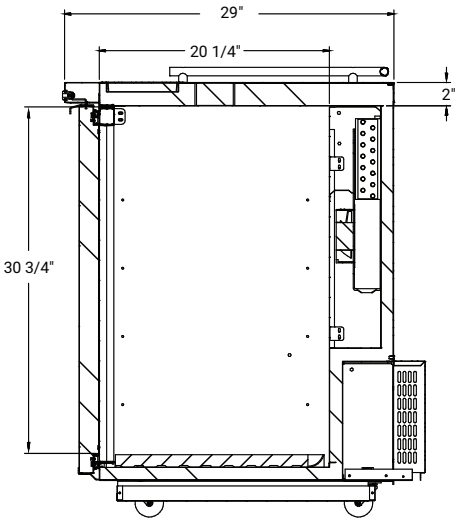

MICRO MATIC

Toll-Free: 1-866-327-4159
www.micromatic.com

West
19791 Bahama St.
Northridge, CA 91324
Tel. (818) 701-9765
Fax. (818) 701-9844

Central
10726 North Second St.
Machesney Park, IL 61115
Tel. (815) 968-7557

Southeast
15111 Dispense Ln.
Brooksville, FL 34604
Tel. (352) 799-6331

Northeast
4601 Saucon Creek Rd.
Center Valley, PA 18034
Tel. (610) 625-4464
Fax. (610) 625-4466

©Micro Matic USA, Inc. All Rights Reserved.