
DRIP TRAY

MICRO MATIC

SURFACE MOUNT SERIES 8" X 51"

- Add European style while creating dispense excitement.
- Condition the glass before pouring – invert glass, push down on sprayer for cold water rinsing.
- More space with 8" width, robust 18 gauge stainless steel construction.
- Welded corners, finished smooth for safety and appearance.

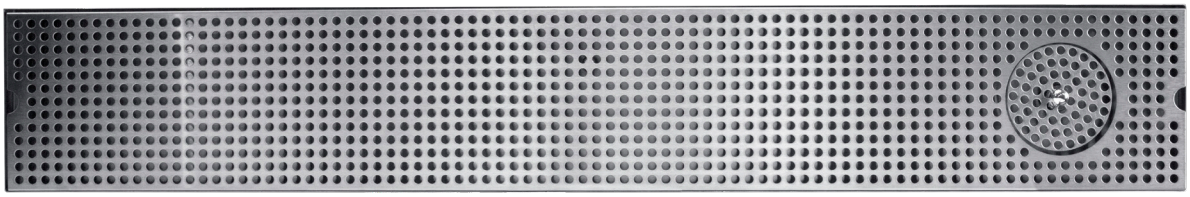

DP-820D-51GR

Brushed Stainless Steel

NSF Glass rinser assembly only.

Job Number:_____ Location: _____

Specifications


Micro Matic reserves the right to change specifications without notice. AutoQuotes

Part No.	Dimensions	Description	Shipping Weight
☐ DP-820D-51GR	8"W x 51"L x 3/4"H	Stainless Steel Drip Tray includes a pipe thread drain nipple (3 1/2" x 5/8 -18) 1/2" I.D. drain hose will attach to drain nipple.	TBD

Rinser Water Inlet Installation

- Always check local plumbing codes first.
- Install in-line water regulator set at 15 PSI from the street water supply (no greater, perfect operating pressure).
- Install in-line one way check valve from the street water supply (prevents pressure drop which can cause leaking).
- Install in-line shutoff for the rinser system from the street water supply (this must be turned off nightly).
- If teed into soda system make sure system can handle the increased water demand. Have plumber install a 45° 1/2" O.D. barb for the drains if line is not hard plumbed into the system.
- Install a shutoff for the rinser water supply if line is not hard plumbed into the system.

Dimensions

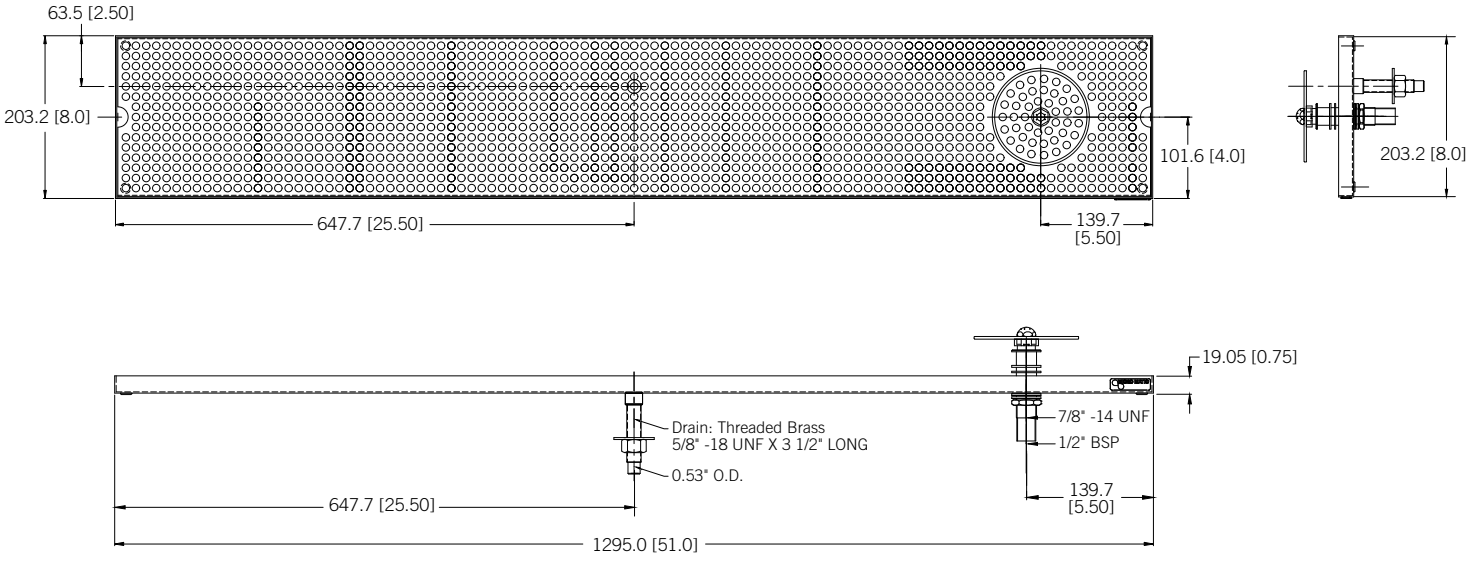

MICRO MATIC

Toll-Free: 1-866-327-4159
www.micromatic.com

West
19791 Bahama St.
Northridge, CA 91324
Tel. (818) 701-9765
Fax. (818) 701-9844

Central
10726 North Second St.
Machesney Park, IL 61115
Tel. (815) 968-7557
Fax. (815) 968-0363

Southeast
15111 Dispense Ln.
Brooksville, FL 34604
Tel. (352) 799-6331
Fax. (352) 796-2429

Northeast
4601 Saucon Creek Rd.
Center Valley, PA 18034
Tel. (610) 625-4464
Fax. (610) 625-4466

000111S-D1023 ©2023 Micro Matic USA, Inc. All Rights Reserved.