K-175
ELECTRONIC SPLASH MOUNT FAUCET

Conforms To NSF 61/9 Lead Free Requirements



Powered by AC or Battery!



Click This Link To View Assembly Sheet

Item #: _____ Qty #: _____

Model #: _____

Project #: _____


FEATURES:

3-1/2" swivel gooseneck spout.
Hot/cold water mixing valve.
Infrared sensor activated.
AC or battery powered
(Requires 4 AA batteries. Not Included).
6' cord
2.2 GPM/3.8 LPM Aerator. 60 PSI.

MATERIAL:

Brass chrome plated body & spout.
Chrome plated handles.

FAUCET AERATOR CONFORM TO ASTM.A112.18.1M • 2.2 GPM/3.8 LPM THREAD: 55/64 - 27 FEMALE



Adjustable Mixing Valve

Replacements Parts

Replacement Control Module

K-09



Replacement Spout For K-175 Faucet

K-175SP




Low Flow Aerator

K-08

.5 GPM



DIMENSIONS and SPECIFICATIONS

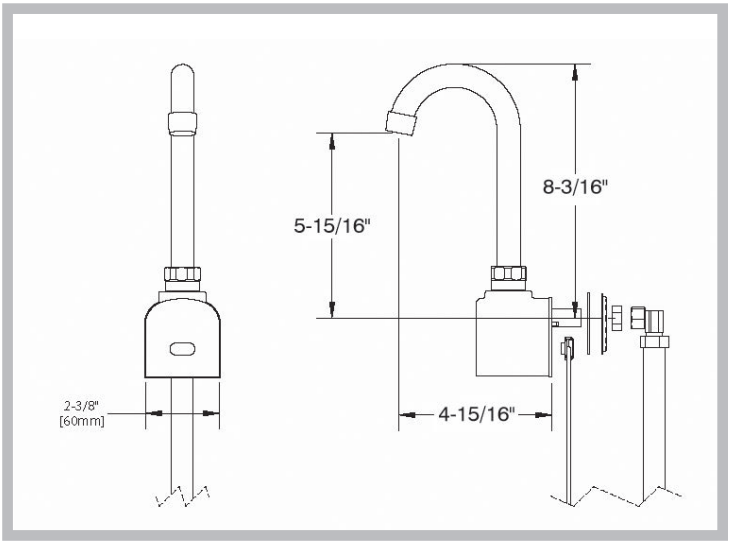

⚠ WARNING:

Faucet(s) on this page may expose you to chemicals, including lead, that are known to the State of California to cause cancer or birth defects or other reproductive harm. For more Info.,visit www.p65warnings.ca.gov.

ADVANCE TABCO SMART FABRICATION™
www.advancetabco.com

Customer Service Available To Assist You 1-800-645-3166 8:30 am - 7:00 pm E.S.T.

For Orders & Customer Service:
Email: customer@advancetabco.com or **Fax:** 631-242-6900

For Smart Fabrication™ Quotes:
Email: smartfab@advancetabco.com or **Fax:** 631-586-2933

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice. © ADVANCE TABCO, AUG. 2026

REF-G