{13.9E}

Metro® C5 E-Series Non-Insulated Heated Holding & Proofing Cabinet

Metro C5 E Series Non-Insulated Heated Holding and Proofing Cabinet provides the right mix of features to economically hold & proof in the same cabinet.

Reliability: The “right” essential features from a trusted brand. Reliability and quality are designed in from the ground up, high-quality components provide a long life of worry free use.

Dual Purpose: Convenience to hold hot food or proof in the same cabinet. Simply flip a switch to go from one mode to another.

Flexibility: Adjustable universal slides provide maximum flexibility to hold different pan styles in the same cabinet. Adjustable on 1-½" increments, holds 12" x 20" pans, GN 1/1 and 2/1 pans, and 18" x 26" sheet pans. Wire shelf accessory can also be added to accommodate other items.

More Power: 2000 watts of power for increased performance and food safety in holding applications. Forced convection design gently circulates hot air for improved temperature consistency. Thermostatically controlled, 80°F (27°C) to 190°F (88°C) operating temperature range.

Clear Door: Clear polycarbonate door provides visibility to the interior contents without the heat loss associated with opening the door.

Quick Access, Field Reversible Door: Easy-to-grab magnetic pull latch provides fast, easy, efficient access to food. Field reversible with high quality adjustable gasket seal.



Full Height Model

Holding & Proofing Capabilities in the Same Cabinet.



Easily change from holding to proofing with the flip of a switch.

Reliable analog thermometer.

Reliable elecro-mechanical control of temperature & humidity.



1/2 Height Model

Metro Heated cabinets are for hot food holding applications only.

All Metro Catalog Sheets are available on our website: **metro.com**

LO2-222 | 2/25

Information and specifications are subject to change without notice.
Please confirm at time of order.
Copyright © 2024 InterMetro Industries Corp.

metro.com
North Washington Street, Wilkes-Barre, PA 18705
Product Information. U.S. and Canada: 1.800.992.1776
Outside U.S. and Canada: metro.com/contactus

{13.9E}

C5 E-Series®
Non-Insulated Heated Holding & Proofing Cabinet

Specifications

Cabinet Material: .063" (1.8mm) thick aluminum body with .125" (3.2mm) aluminum base.

Casters: Plate mounted, 2 swivel and 2 swivel with brake. 5" (127mm) diameter donut neoprene wheel. Double ball bearing swivel, ball bearing axel, nickel plated.

Door: Extruded aluminum frame with 0.90" (2.3mm) polycarbonate window. Field reversible, 180° swing.

Door Latch: Polymer, high-strength magnetic latch with lever-action release.

Door Gaskets: High temperature, door mounted, Santoprene gasket. Removable without tools.

Door Hinges: Field reversible, double hinged, 180° swing with long-life nylon bearings.

Universal Pan Slides: ¼" (6.4mm) diameter nickel-chrome electroplated wire, adjustable on 1-½" (38mm) increments.

Control Module: Thermostatically controlled with tubular heating elements, ball bearing blower motor, and ducted air system. 2000W of power in hold mode, 720W in proof mode. Removable with tools for cleaning & service.

Cord: 7½" power cord with NEMA 5-20P plug end for 120V, NEMA 6-15P plug end for 220-240V.


Drip Trough: Aluminum drip trough with polymer catch pan.

Accessories

(Ship separately)

- **Small Item Shelf** (C5-SHELF-S)
- **Universal Slide Pair** (C5-USLIDEPR-C)

Dimensions

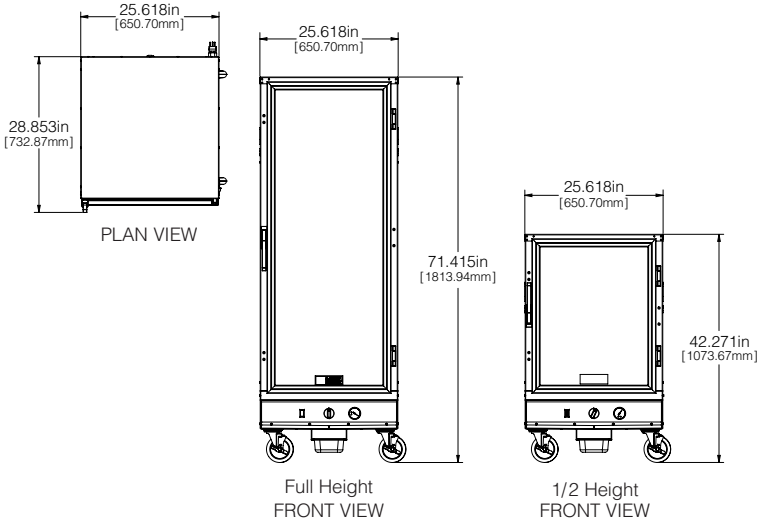

Cabinets

Size	Electrical	Cat No.	Approx. Pkd. Wt. (lbs.)
Full Height	120V, 60Hz	**C5E9-CFC-U**	113
1/2 Height	120V, 60Hz	**C5E5-CFC-U**	104
Full Height	220-240V, 50/60Hz	**C5E9-CXFC-U**	113

120V Electrical & Model Number
16A, 60Hz, 2000W



NEMA 5-20P

220-240V Electrical & Model Number
7.6-8.3A, 50/60Hz, 1681-2000W



NEMA 6-15P

* Not Available in 1/2 Height



Pan Capacities

Cabinet Height	Slide Pairs		Sheet Pans	Steam Pans			Gastronorm 65mm Depth		Gastronorm 100mm Depth		Gastronorm 150mm Depth	
	Provided	Max	18"x26"	12"x20"x2.5"	12"x20"x4"	12"x20"x6"	2/1	1/1	2/1	1/1	2/1	1/1
Full	12	35	12*	24*	24	14	12*	24*	12	24	7	14
1/2	6	16	6*	12*	12	6	6*	12	6	12	3	6

Note: Maximum number of slide pairs @ 1.5" spacing. Additional slide pairs ordered separately.
* With additional slide pairs, cabinets can accommodate up to:
Full Height Cabinets: (35) 18x26, (36) 12x20x2.5, or GN 1/1 65mm, (18) GN 2/1 65mm
1/2 Height Cabinets: (16) 18x26, (14) 12x20x2.5, or GN 1/1 65mm, (7) GN 2/1 65mm