OLYMPUS H81-TB

PROJECT: _____

ITEM: _____ **QUANTITY:** _____

MODEL # SCAS-SC-TB

SPECIFICATIONS

The TB is a plug-in multideck display case designed to provide a large, attractive display area and a wide range of configurations. It is available with one, two, or three triple-pane hinged doors with automatic closing. Magnetic door gaskets are constructed as a single piece and can be easily removed for cleaning. Door handles are available in stainless steel or painted in matte RAL 9005 black. The unit features a bottom-mounted, high-efficiency refrigeration system using R290 natural refrigerant. A fully removable control panel and pull-out condensing unit provide easy access for maintenance. Defrost is automatic (off-cycle).

Available lengths: ☐ *26 5/16"* ☐ *49 1/4"* ☐ *73 3/4"*
Available depths: ☐ *35 1/8"*
Available heights: ☐ *80 5/8"*



Shown with optional white interior

STANDARD FEATURES

- *Triple-pane hinged doors with black handles RAL9005*
- *Interior finish: matte black RAL 9005*
- *Upper front panel: matte black RAL 9005*
- *Lower front panel: matte black RAL 9005*
- *Solid end panels*
- *Adjustable feet (4)*
- *LED lighting (5700K) on vertical sides and canopy*
- *Tool-free removable front grill*
- *Magnetic condenser filter*
- *Self-contained*
- *Automatic defrost (off-cycle)*
- *Digital temperature control*
- *Five (5) shelves, 19" depth*
- *Clear price tag molding on shelves (1.5")*
- *Condensate evaporation included*

OPTIONAL ACCESSORIES

- ☐ *Additional powder coat color options (contact factory)*
- ☐ *Casters (in place of standard feet)*
- ☐ *Advanced monitoring system*
- ☐ *LED lighting options (3000K or 4000K)*
- ☐ *Shelf and well dividers*
- ☐ *Stainless steel handles*

MODEL	L	D	H	VOLT	AMPS	PLUG	W	WT	REFRIG.
SCAS26R-SC-TB1	26 5/16”	35 1/8”	80 5/8”	230V	5	6-15	1170	374	R290
SCAS52R-SC-TB1	49 1/4”	35 1/8”	80 5/8”	230V	12	6-15	2340	683	R290
SCAS79R-SC-TB1	73 3/4”	35 1/8”	80 5/8”	230V	17	6-30	3510	1080	R290

Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120


RPI INDUSTRIES, INC.
www.rpiindustries.com CALL TOLL FREE: 1-800-525-3692 (609-714-2330) 220 ROUTE 70, MEDFORD, NJ 08055


OLYMPUS H81-TB


PROJECT:


TOLL FREE: 800-525-3692


MODEL # SCAS-SC-TB1

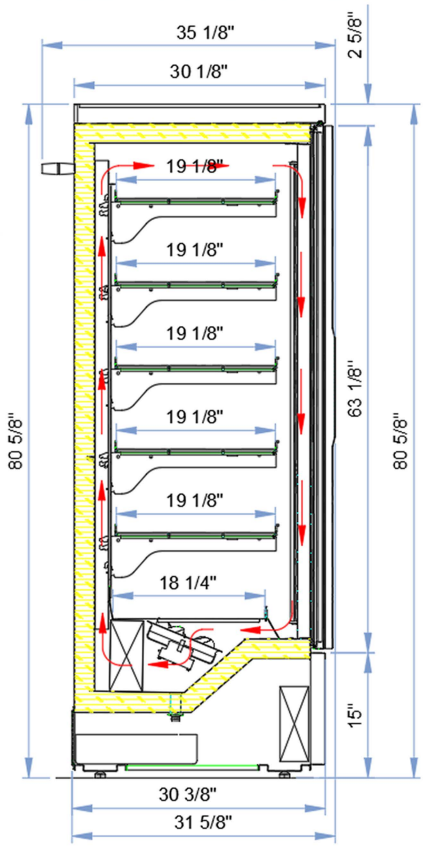

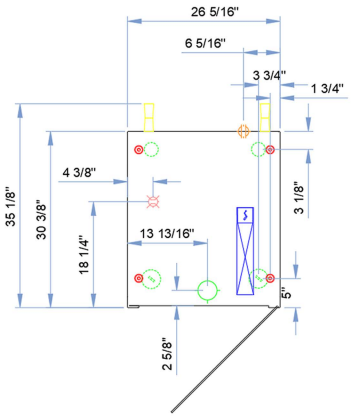

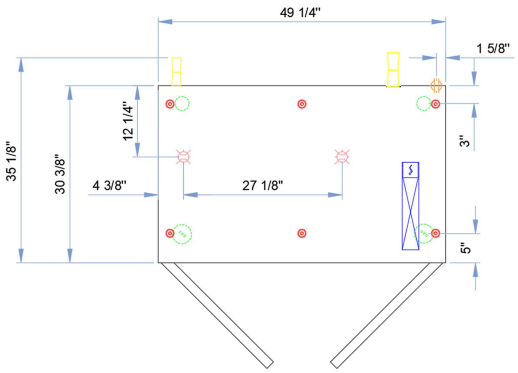

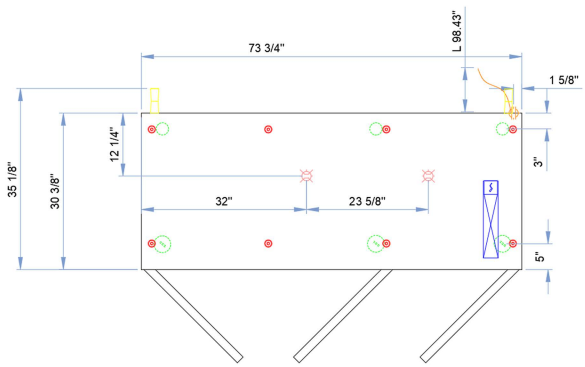

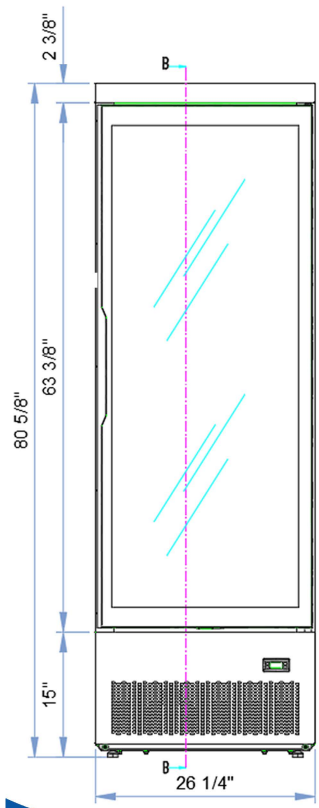

1. Refrigeration System is designed so air will flow front to rear. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.

2. This merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 80 Degrees Fahrenheit and 60% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. Any adverse field conditions stated above will void warranty.

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.