OLYMPUS H81-HE

PROJECT: _____

ITEM: _____ **QUANTITY:** _____

MODEL # SCAS-SC-HE1

SPECIFICATIONS

The H81-HE is a plug-in multideck designed to provide a large and visually appealing display area, along with a wide range of configurations. It is available in multiple sizes and can be multiplexed for continuous layouts. The unit can be supplied as open-front or equipped with various door system options. The H81-HE integrates seamlessly into a variety of retail environments, from convenience stores to large supermarkets.

Energy consumption is reduced by up to 53%, while noise levels are reduced by up to 7 dB(A). The unit features maintenance-free heat exchangers, electronically controlled fans, and variable-speed compressors, representing a high level of technological performance.

Available lengths: ☐ *40 5/16"* ☐ *52 7/16"* ☐ *77 7/16"* ☐ *101 5/8"*
Available depths: ☐ *37 3/4"*
Available heights: ☐ *80 7/8"*



STANDARD FEATURES

- *Double-pane hinged glass doors*
- *Interior finish in matte Black (RAL 9005)*
- *Top front panel in matte black (RAL 9005)*
- *Lower front panel in matte black (RAL 9005)*
- *Glass end panels*
- *Adjustable feet (4)*
- *LED lighting (4000K) under shelves*
- *Magnetic condenser filter*
- *Preset automatic defrost*
- *Self-contained*
- *Digital temperature control*
- *One (1) illuminated upper shelf – 15 3/4"*
- *Four (4) illuminated lower shelves – 17 3/4"*
- *Condensate evaporation included*

OPTIONAL ACCESSORIES

- ☐ *Interior, exterior, and side panels available in stainless steel (polished or satin) in lieu of powder coat*
- ☐ *Additional powder coat colors available (consult factory)*
- ☐ *Solid or mirrored end panels in lieu of glass (check dimensions with factory)*
- ☐ *Remote refrigeration version available*
- ☐ *Casters*
- ☐ *Advanced monitoring system*
- ☐ *LED lighting options (3000K or 5700K)*
- ☐ *Dividers for well and shelves*
- ☐ *Angled top mirror for product display*
- ☐ *Top-mounted hanging bar*
- ☐ *Tag molding options (consult factory)*
- ☐ *Remote monitoring system*

MODEL	L	D	H	VOLT	AMPS	PLUG	W	WT	REFRIG.
SCAS39R-SC-HE1	40 5/16"	37 3/4"	80 7/8"	230V	1,6	6-15	260	640	R600a
SCAS51R-SC-HE1	52 7/16"	37 3/4"	80 7/8"	230V	3,6	6-15	530	772	R600a
SCAS76R-SC-HE1	77 7/16"	37 3/4"	80 7/8"	230V	3,7	6-15	610	1102	R600a
SCAS98R-SC-HE1	101 5/8"	37 3/4"	80 7/8"	230V	4,7	6-15	760	1260	R600a

Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120


RPI INDUSTRIES, INC.
www.rpiindustries.com CALL TOLL FREE: 1-800-525-3692 (609-714-2330) 220 ROUTE 70, MEDFORD, NJ 08055


OLYMPUS H81-HE


PROJECT:


TOLL FREE: 800-525-3692


MODEL # SCAS-SC-HE1

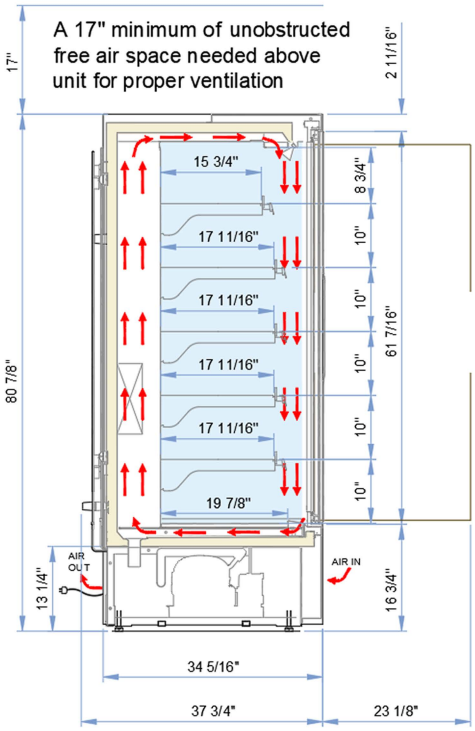


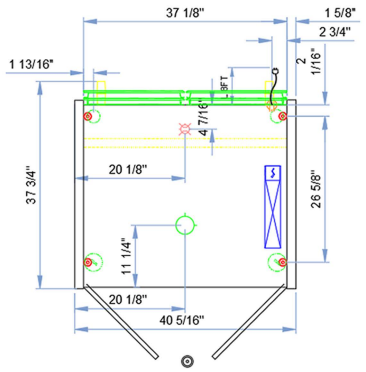

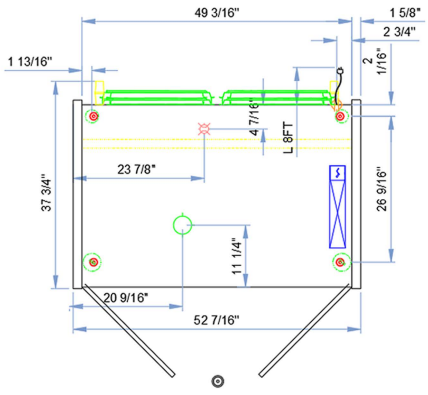

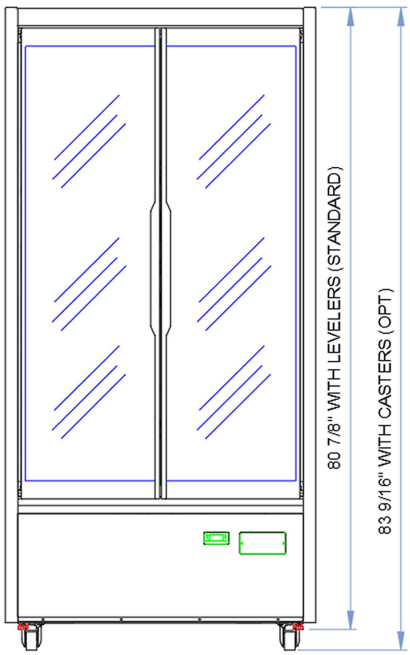

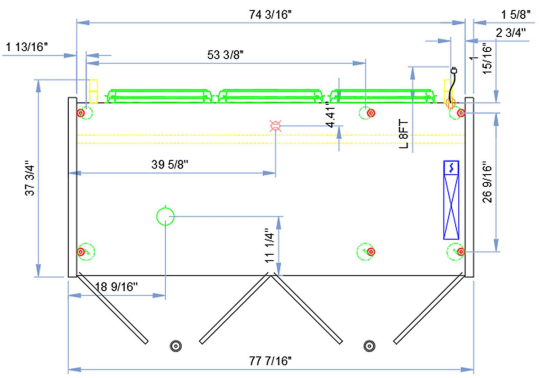

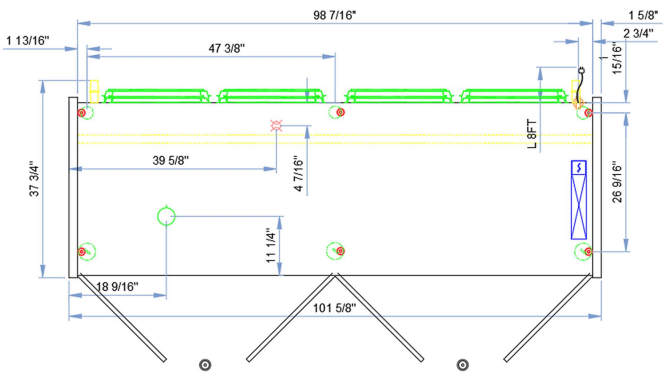

1. *Refrigeration System is designed so air will flow front to rear. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.*

2. *This merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 80 Degrees Fahrenheit and 60% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. Any adverse field conditions stated above will void warranty.*

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.