OLYMPUS H59 OPEN

PROJECT: _____

ITEM: _____ **QUANTITY:** _____

MODEL # SCAS-SC-H59

SPECIFICATIONS

The H59 is a plug-in multideck designed to provide a large and visually appealing display area, along with a wide range of configurations. It is available in two heights and four lengths and can be multiplexed for continuous layouts. The unit can be supplied as open-front or equipped with three different door system options. The H59 integrates seamlessly into a variety of retail environments, from convenience stores to large supermarkets.



Available lengths: ☐ *39"* ☐ *51 1/8"* ☐ *76 1/8"*
Available depths: ☐ *37.3/4"*
Available heights: ☐ *59 3/8"*

STANDARD FEATURES

- *Open front design*
- *Interior finish in matte black (RAL 9005)*
- *Top front panel in matte black (RAL 9005)*
- *Lower front panel in matte black (RAL 9005)*
- *Adjustable feet (4)*
- *LED lighting (4000K) under shelves*
- *Night blind*
- *Tool-free removable front grill*
- *Magnetic condenser filter*
- *Preset automatic defrost*
- *Self-contained*
- *Digital temperature control*
- *One (1) illuminated upper shelf – 13 3/4"*
- *Two (2) illuminated lower shelves – 15 3/4"*
- *Condensate evaporation included*

OPTIONAL ACCESSORIES

- ☐ *Interior, exterior, and side panels available in stainless steel (polished or satin) in lieu of powder coat*
- ☐ *Additional powder coat colors available (consult factory)*
- ☐ *Solid or mirrored end panels in lieu of glass*
- ☐ *Remote version available*
- ☐ *Casters*
- ☐ *LED lighting options (3000K or 5700K)*
- ☐ *Dividers for well and shelves*
- ☐ *Angled top mirror for product display*
- ☐ *Top-mounted hanging bar*
- ☐ *Tag molding options (consult factory)*
- ☐ *Advanced remote monitoring system*

MODEL	L	D	H	VOLT	AMPS	PLUG	W	WT	REFRIG.
SCAS39R-SC-H59	39"	37 3/4"	59 3/8"	230V	9,2	6-15	1700	440	R290
SCAS51R-SC-H59	51 1/8"	37 3/4"	59 3/8"	230V	9,4	6-15	1760	530	R290
SCAS76R-SC-H59	76 1/8"	37 3/4"	59 3/8"	230V	18	6-30	3340	750	R290


Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120


RPI INDUSTRIES, INC.
www.rpiindustries.com CALL TOLL FREE: 1-800-525-3692 (609-714-2330) 220 ROUTE 70, MEDFORD, NJ 08055


OLYMPUS H59 OPEN


PROJECT:
TOLL FREE: 800-525-3692


MODEL # SCAS-SC-H59

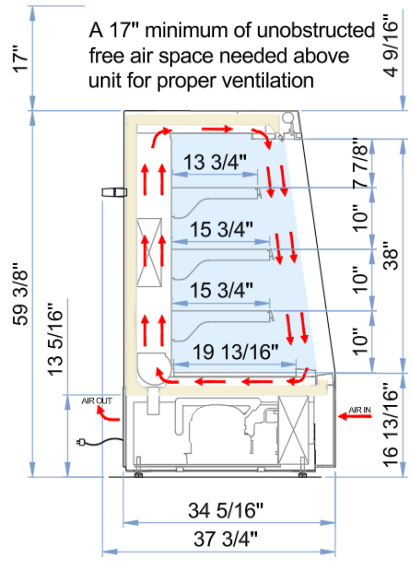

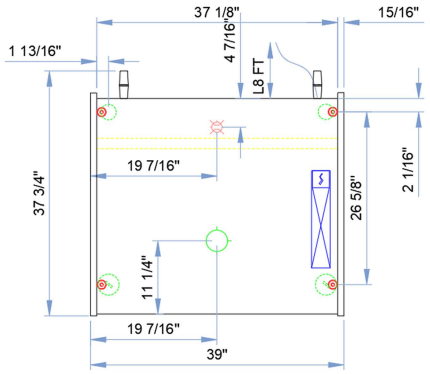

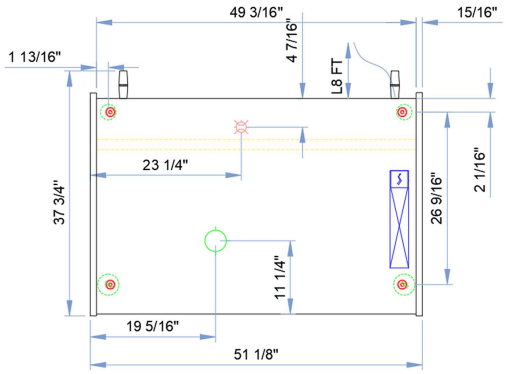

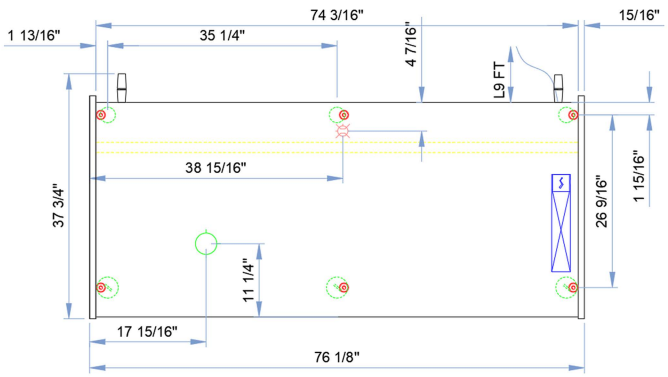

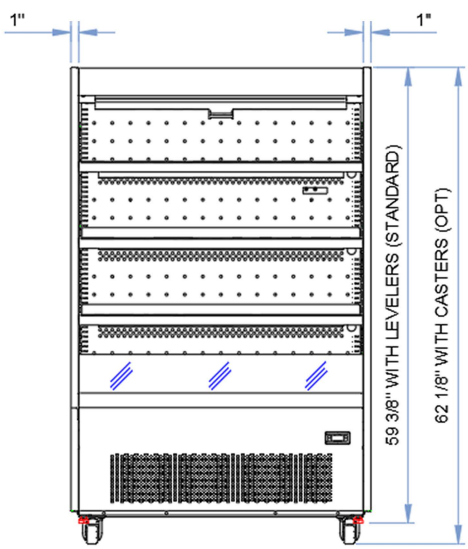

Shown with the optional casters

1. *Refrigeration System is designed so air will flow front to rear. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.*
2. *This merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 80 Degrees Fahrenheit and 60% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. Any adverse field conditions stated above will void warranty.*

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.