OLYMPUS BACK COUNTER

PROJECT: _____
ITEM: _____ **QUANTITY:** _____

MODEL # SCAS-SC-BC

SPECIFICATIONS

The large display front combined with the raised base creates an extraordinary display capacity that combines with a high level of ergonomics for the operator.
Up to 5 adjustable shelves, the hook bar and the gourmet fitting options ensure maximum functionality and flexibility.
The customization of internal and external finishes completes the versatility of the Olympus Back Counter and makes it the ideal solution for any type of store.
Like all Olympus designs, it is also available with remote refrigeration



Available lengths: ☐ *51 1/8"* ☐ *76 1/8"* ☐ *101 1/8"*
Available depths: ☐ *37 5/8"*
Available heights: ☐ *93 1/2"*

STANDARD FEATURES

- *Open front design*
- *Interior finish in matte black (RAL 9005)*
- *Top front panel in matte black (RAL 9005)*
- *Bottom front panel in matte black (RAL 9005)*
- *Glass side panels*
- *Adjustable feet (4)*
- *LED lighting (4000K) under shelves*
- *Manual night curtain*
- *Tool-free removable front grid*
- *Magnetic condenser filter*
- *Preset automatic defrost*
- *Self-contained*
- *Digital temperature control*
- *Illuminated canopy*

OPTIONAL ACCESSORIES

- ☐ *Interior, exterior, and side panels available in stainless steel (polished or satin) in lieu of powder coat*
- ☐ *Additional powder coat colors available (consult factory)*
- ☐ *Solid or mirrored end panels in lieu of glass (check dimensions with factory)*
- ☐ *Remote version available*
- ☐ *Advanced remote monitoring system*
- ☐ *LED lighting options (3000K or 5700K)*
- ☐ *Dividers for well and shelves*
- ☐ *Angled top mirror for product display*
- ☐ *Top-mounted hanging bar*
- ☐ *Tag molding options available (consult factory)*
- ☐ *Separate light cable*
- ☐ *Illuminated shelves*

MODEL	L	D	H	VOLT	AMPS	PLUG	W	WT	REFRIG.
SCAS39R-SC-BC	39”	37 5/8”	93 1/2”	230V	9,4	6-15	1760	650	R290
SCAS76R-SC-BC	76 7/8”	37 5/8”	93 1/2”	230V	19	6-30	3400	940	R290
SCAS101R-SC-BC	101 1/8”	37 5/8”	93 1/2”	230V	19	6-30	3510	1070	R290

Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120


RPI INDUSTRIES, INC.
www.rpiindustries.com CALL TOLL FREE: 1-800-525-3692 (609-714-2330) 220 ROUTE 70, MEDFORD, NJ 08055


OLYMPUS BACK COUNTER


PROJECT:


TOLL FREE: 800-525-3692


MODEL # SCAS-SC-BC

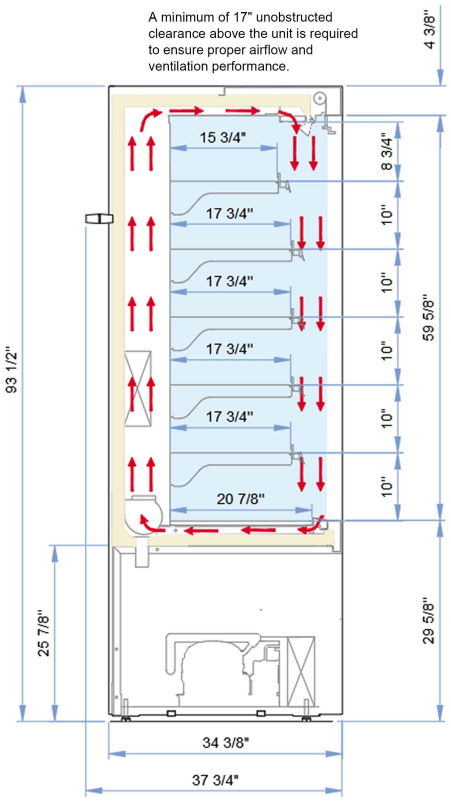


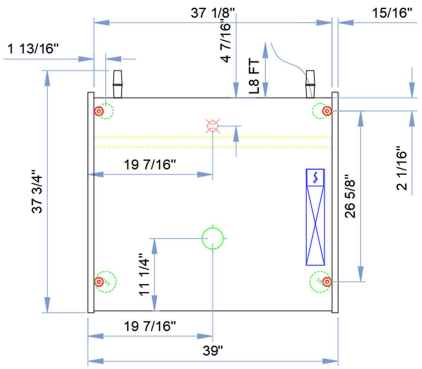

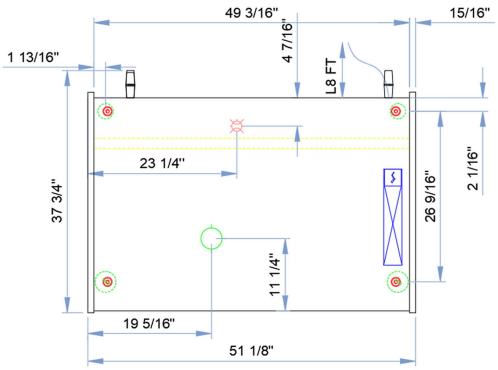

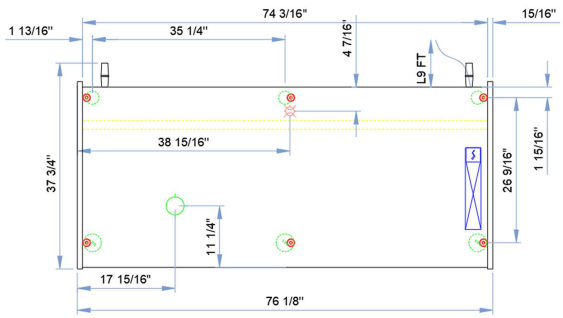

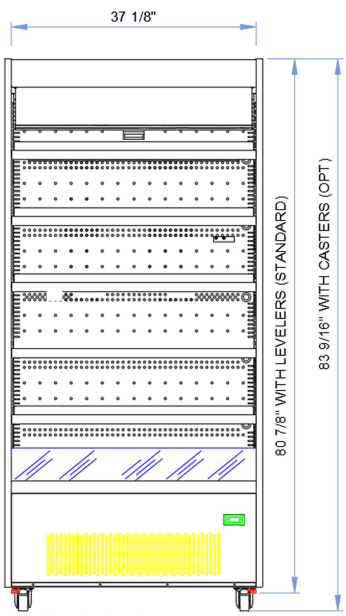

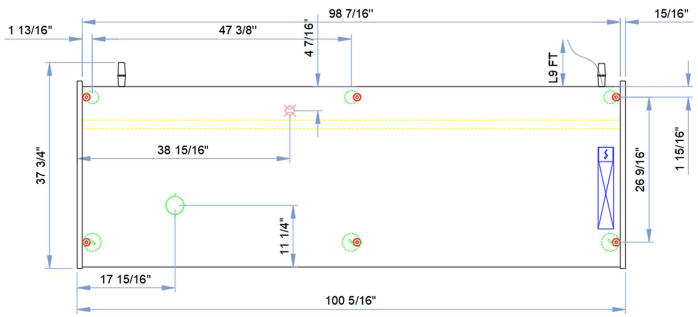

1. Refrigeration System is designed so air will flow front to rear. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.

2. This merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 80 Degrees Fahrenheit and 60% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. Any adverse field conditions stated above will void warranty.

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.