"PB-SS" MOBILE SOAK SINK

16GA Stainless Steel Construction

FEATURES:

- Standard 16GA Stainless Steel Construction
- Type 300 Stainless Steel With #4 Polish, Satin Finish
- All Corners, Both Vertical And Horizontal, Coved At 5/8" Radius
- Bottoms Of Bowls Formed For Drainage To 3-1/2"
- Diameter Die Stamped Opening
- Top Is Finished With A 1-1/2"x1" No-Drip Edge With A 2" Turn Down On All Sides
- Standard Legs 1-5/8" Diameter, 16GA Stainless Steel, Type 300 Stainless Steel With #4 Polish, Satin Finish
- Twist Lever Waste For Easy Clean In Remote Operations

SPECIFICATIONS:

- Top: Stainless Steel Sinks Are TIG Welded, Exposed Welds Are Polished To Match Adjacent Surface
- Base: Stainless Steel Bases Are MIG Welded
- Bowls & Top: 16GA Type 300 Stainless Steel With #4 Polish, Satin Finish
- Legs: 1-5/8" Round O.D. Stainless Steel
- Bracing: 1-1/4" Round O.D. Stainless Steel
- Gussets: Stainless Steel
- Caster: 5" Swivel



PB-SS-208

ACCESSORIES

MODEL	DESCRIPTION
PB-SS-CHUTE	16GA S.S. Chute


"PB-SS" MOBILE SOAK SINK


MODEL	BOWL SIZE (LXWXH)	OVERALL SIZE (LXWXH)	WEIGHT (LBS)
PB-SS-208	20"x20"x8"	27"x27"x21-3/4"	35


ALL DIMENSIONS ARE TYPICAL. TOLERANCE +/- .500". JOHN BOOS & CO. RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

JOHN BOOS & CO. • 3601 S BANKER ST • EFFINGHAM, IL 62401
PH: (888) 431-2667 • FAX: (800) 433-2667 • JOHNBOOS.COM

DETAILED SPECIFICATIONS

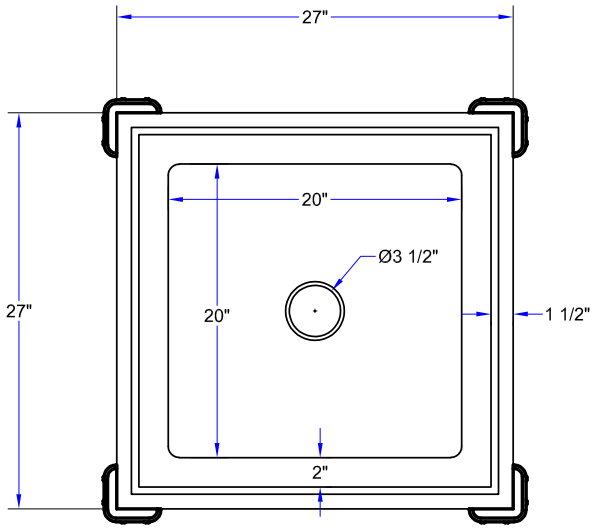

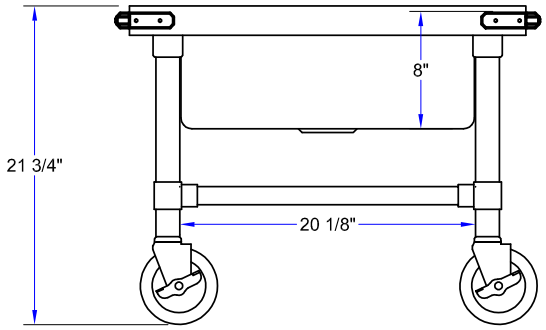

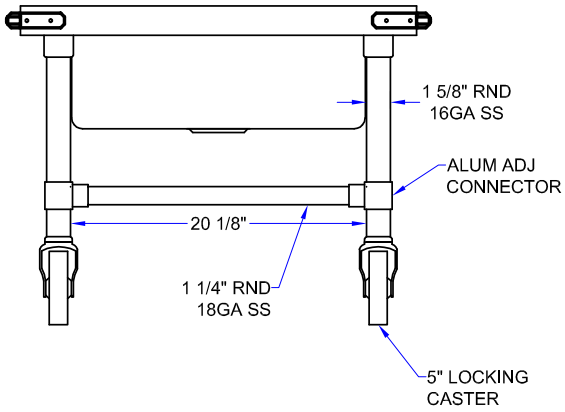

"PB-SS" MOBILE SOAK SINK

MODEL	BOWL SIZE (LXWXH)	OVERALL SIZE (LXWXH)	WEIGHT (LBS)
PB-SS-208	20"x20"x8"	27"x27"x21-3/4"	35

ALL DIMENSIONS ARE TYPICAL. TOLERANCE +/- .500". JOHN BOOS & CO. RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.