Glastender®

A family company manufacturing in the USA

www.glastender.com

Project: _____	AIA#
Item #: _____ Qty: _____	SIS#
Model #: _____	

Drop-In Hand Sinks

DI-HS | DI-HS12, DI-HS12-LF, DI-HS14, DI-HS14-LF



DI-HS12



DI-HS14

C ETL LISTED US Intertek 4004503

ETL SANITATION LISTED Intertek 4004503

Conforms to NSF/ANSI STD 2
Certified to ASME112.19.3 / CSA/CAN STD B45.4

Standard Features

- Manufactured with total welded construction to meet all NSF® standards
- All stainless steel construction
- Unique hemmed edge for added strength and visual appeal
- 9-1/4″ by 11-1/2″ by 6″ deep sink bowl
- Includes four 1/4-20 x 1-1/2″ studs for mounting to countertop
- Includes 1-1/2″ IPS drain fitting
- Heavy-duty faucet is standard (available less faucet by adding the suffix '-LF' to the model number)

All faucets are NSF/ANSI 61, Annex G low lead compliant

Specifications

Drains
- 1-1/2″ I.P.S. Threaded drain will fit Dearborn part #8033 slipnut and part #W-573P washer.

Faucet
- Deck mount on 4″ centers, accepts 3/8″ sink leads, hot and cold water connections required

Sink Bowl Dimensions
- 9-1/4″ by 11-1/2″ by 6″ deep

Materials
- 20 gauge stainless steel

⚠**WARNING:** The plastic wet waste strainer included with this product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov. **Warning applies to State of California only.** Part #03000483

Cleaning & care instructions: https://www.glastender.com/support/documents/manuals/general-cleaning-and-care-instructions-for-stainless-steel


Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Approval/Notes:


Specifications subject to change without notice. For current specifications please visit our website.

Drop-In Hand Sinks


Dimensional Information

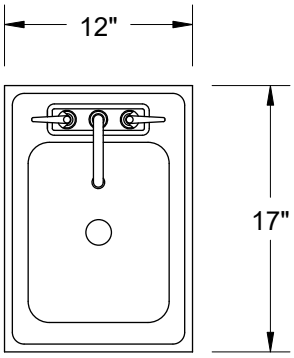

PLAN VIEW

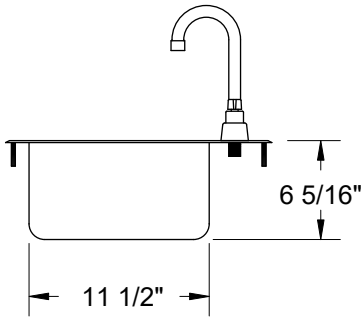


SIDE VIEW




FRONT VIEW


DI-HS12



PLAN VIEW




SIDE VIEW



FRONT VIEW

DI-HS14


INSTALLATION INFORMATION

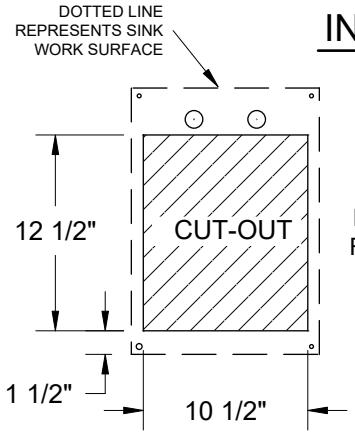

DI-HS12

CUT-OUT DIMENSIONS:
10-1/2" x 12-1/2" FOR SINK BOWL
TWO 1-1/8" DIAMETER HOLES FOR SINK LEADS AND FOUR 5/16" DIAMETER HOLES FOR MOUNTING STUDS MUST BE DRILLED AT TIME OF SINK INSTALLATION

NOTE: Tops thicker than 1" will require larger holes to make faucet connections. The mounting studs provided are for use with tops up to 1-1/2" thick.

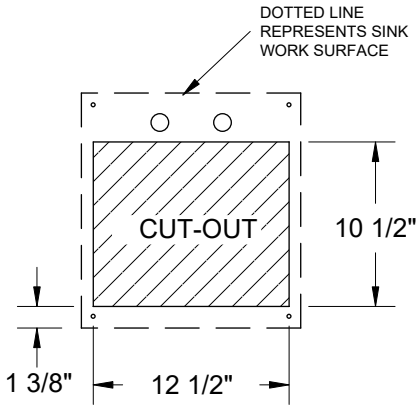

DI-HS14

1. Place unit into appropriate size cut-out for specific model number used.
2. Make initial drain connections, especially if access to drain is limited once the unit is in place.
3. To establish proper sanitation operation and to comply with NSF & health codes, this unit must be sealed to the surface to which it is mounted using an NSF listed sealant. Place a bead of sealant along outer edges of the mounting flange and remove any excessive amount. Make sure there are no gaps in the sealant as the intent is to prevent liquid spillage from adjacent surfaces from passing under inaccessible portions of the equipment.
4. Complete plumbing connections.

Glastender®
5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Printed in USA