Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301



E-3-CBSS

Approval Stamp(s):

PRODUCT INFORMATION:
PROJECT: _____
ITEM: _____
QUANTITY: _____
MODEL:

Thurmaduke® Steamtables
Hot Food Units - Electric - Standard

- ❑ E-2-CBPG/E-2-CBSS 2 top openings
- ❑ E-3-CBPG/E-3-CBSS 3 top openings
- ❑ E-4-CBPG/E-4-CBSS 4 top openings
- ❑ E-5-CBPG/E-5-CBSS 5 top openings
- ❑ E-6-CBPG/E-6-CBSS 6 top openings

TOP:

- ■ 16 gauge, 300 Series stainless steel
- ■ Die-stamped openings - 11 7/8" x 19 7/8"

HEAT COMPARTMENTS:

- ■ 6 ½" deep Sealed wells with drains
- ■ Wet heat operation
- ■ Fully Insulated Wells
- ■ Copper manifolds and brass master valve
- ❒ 750 watt - Standard
- ❒ 1200 watt - Optional
- ■ Master Toggle Switch w/ indicator light for entire unit
- ■ Single Phase standard

BODY AND INTERIOR SHELF:

- ❒ Stainless Steel body
- ❒ Painted body w/ choice of powder coat colors
- ■ Stainless Steel Front Panel w/ control knobs
- ■ Wire knob guards
- ■ Full bottom shelf to match body
- ■ 6" polished stainless steel adjustable legs

OPTIONS:

- ❑ 14 gauge tops
- ❑ 1/2" poly cutting surface added to integral top
- ❑ Backsplash
- ❑ Recessed top (to accommodate griddles, fryers, etc.)
- ❑ Adaptor plates
- ❑ 3-phase wiring
- ❑ 6', 8' or 10' Cord and plug
- ❑ Heated base module
- ❑ Electric outlet in base
- ❑ Sliding Doors
- ❑ Pass-thru construction
- ❑ Veneered plastic laminate panels on body
- ❑ Casters (add cord and plug), 5" swivel with locks
- ❑ Food shields
- ❑ Tray slides
- ❑ Work shelves
- ❑ Customer side Kickplates - Stainless steel or Painted
- ❑ 34" ADA height (units finish at 33.5"). Adjustable height casters with 5/8" adjustability allow leveling to 34"

Certifications

DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102
800.735.3853 Toll Free
314.231.5074 Fax
www.dukemfg.com

Specification subject to change

WARNING For CA residents: go to www.dukemfg.com/prop65 for prop 65 warning


A.I.A. File No. 35-C-13

Catalog No. TST-STELECHOT


THURMADUKE® STEAMTABLES - HOT FOOD - ELECTRIC - STANDARD


Thurmaduke®

Steamtables Hot Food Units - Electric - Standard

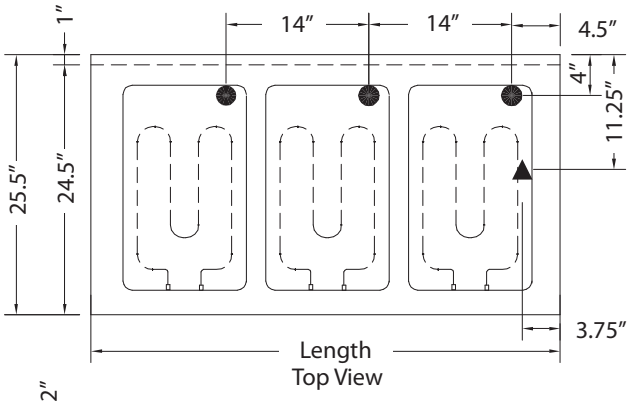

LEGEND	
▲	ELECTRICAL CONNECTION
●	DRAIN LOCATION

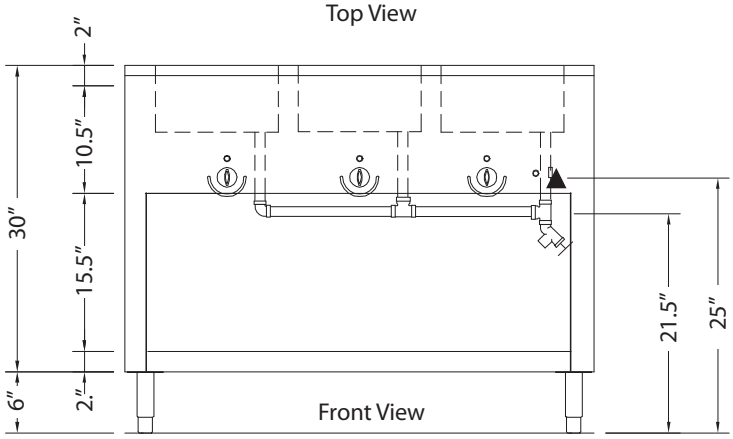

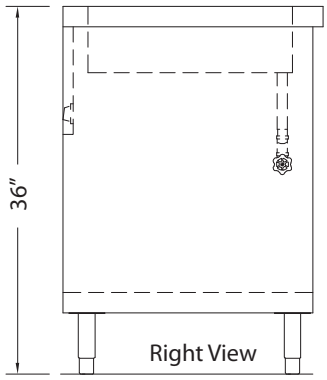

DIMENSIONS: **FREIGHT CLASS: 150**

Model		Length		Depth		Height		Top Openings	Cube ft. Crated	Weight	
Enameled	Stainless	in	cm	in	cm	in	cm			lbs	kg
E-2-CBPG	E-2-CBSS	32	81.3	25-1/2	64.8	36	91.4	2	28.1	210	95.5
E-3-CBPG	E-3-CBSS	46	116.8	25-1/2	64.8	36	91.4	3	39.6	264	120.0
E-4-CBPG	E-4-CBSS	60	152.4	25-1/2	64.8	36	91.4	4	51.2	344	156.4
E-5-CBPG	E-5-CBSS	74	188.0	25-1/2	64.8	36	91.4	5	62.3	433	196.8
E-6-CBPG	E-6-CBSS	88	223.5	25-1/2	64.8	36	91.4	6	74.3	527	239.6

Electrical Specifications:

(Consult factory for 3-phase electrical requirements and other options)

Cord & NEMA plug NOT included

Model	120V 750W			208V 750W			240V 750W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
E-2-CBPG/SS	1500	12.5	5-15	1500	7.2	6-20	1500	6.3	6-20
E-3-CBPG/SS	2250	18.8	L5-30	2250	10.8	6-20	2250	9.4	6-20
E-4-CBPG/SS	3000	25.0	5-50	3000	14.4	6-20	3000	12.5	6-20
E-5-CBPG/SS	3750	31.3	5-50	3750	18.0	L6-30	3750	15.6	L6-30
E-6-CBPG/SS	N/A			4500	21.6	L6-30	4500	18.8	L6-30

Model	120V 1200W			208V 1200W			240V 1200W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
E-2-CBPG/SS	2400	20	L5-30	2400	11.5	6-20	2400	10	6-20
E-3-CBPG/SS	3600	30	5-50	3600	17.3	L6-30	3600	15	6-20
E-4-CBPG/SS	N/A			4800	23.1	L6-30	4800	20	L6-30
E-5-CBPG/SS	N/A			6000	28.9	6-50	6000	25	6-50
E-6-CBPG/SS	N/A			7200	34.6	6-50	7200	30	6-50

Duke Your Solutions Partner

Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com

Printed in U.S.A
© 2025, Duke Manufacturing Co.